rotronic

Datenblatt - Fiche technique - Data sheet

11.99.5525

VALUE Monitorkabel DVI, DVI ST-ST, (24+1) dual link, 2,0m

VALUE Câble DVI, DVI M-M, (24+1) dual link, 2,0m

VALUE Monitor DVI Cable, DVI M – DVI M, (24+1) dual link, 2 m

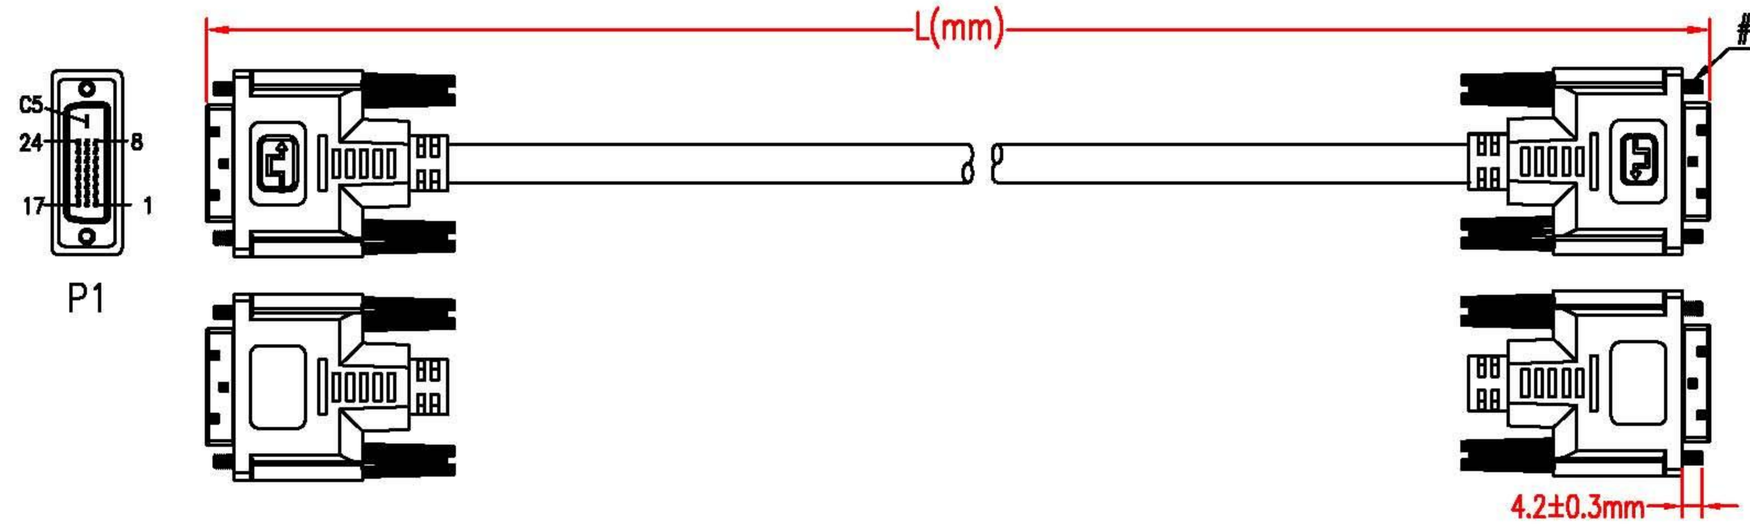



PIN OUT

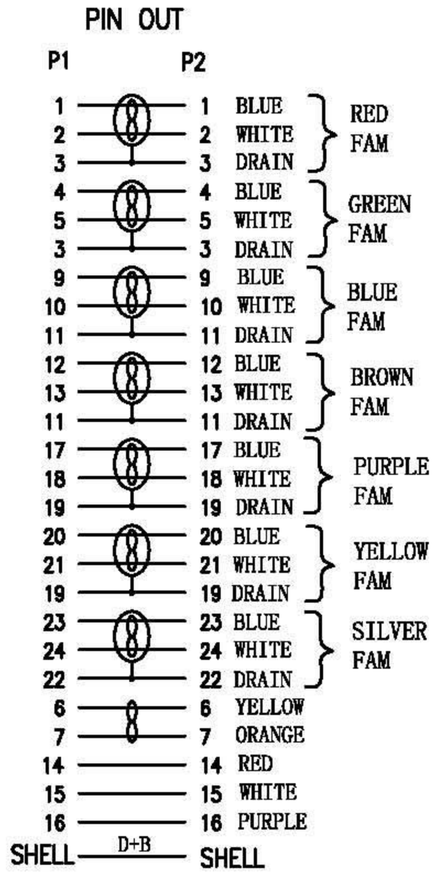

NOTES:

1. MATERIAL
   1.1 DVI CABLE: {[7/0.10TCx1P+D(7/0.10TC)+FAM]x7PCS+7/0.12TCx1P+7/0.12TCx3C}
   +AM+D(7/0.12TC)+B (16/8/0.12ALM) +BLACK PVC JACKET.
   OD: ⌀ 7.3 ± 0.2 mm
   MARKING:VW-1 DVI CABLE 80℃ 30V
   1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS G/F, NICKEL PLATED SHELL.
   1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
   1.4 ALL HOOD: MOLDED BLACK PVC.
2. ELECTRICAL
   2.1 100% OPEN AND SHORT TEST.
   2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
   2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
   2.4 HI-POT: DC300V/0.01S.
3. PACKAGING: A PC/PE-BAG PACKAGING .
4. ALL MATERIALS ARE REACH COMPLIANT.

P/N CHART

ITEM NO.	L
11.99.5521	1000±30mm
11.99.5525	2000±50mm
11.99.5535	3000±70mm
11.99.5555	5000±70mm

REV.	MODIFY DESCRIPTION	DATE
01	ADD THE ONE	2012-01-05
00	NEW ISSUE	2011-03-22

LENGTH TOLERANCE: X. ± 0.5, .X ± 0.2, .XX ± 0.1
ANGLE TOLERANCE: X° ±3°, .X° ±1°
SCALE: FREE
UNIT: mm
VERSION: 01
PAGE: 1/1

Rotronic Co., Ltd.

VALUE DVI Cable, DVI M-M, dual link, black

ENG:
CHECKED:
APPROVED: